


219.00 EUR  
incl. 19% VAT, plus [shipping](#)

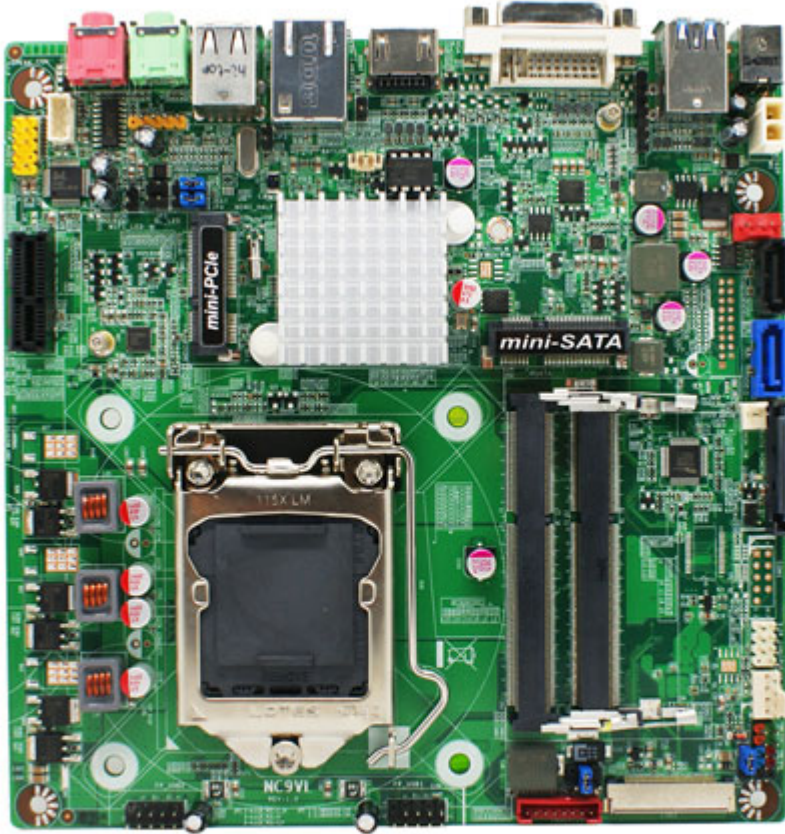

- Intel® H81 Chipset
- Supports Intel LGA 1150 Socket 4th Generation Core™ i3, i5, i7 & Pentium Processors
- 2 \* Dual Channel SO-DIMM DDR3-1333/1600 up to 16GB
- 1\*HDMI output
- Support CPU Smart FAN
- Supports 1 \* Gigabit LAN
- Supports ACPI S3 Function
- Support Watch dog Technology
- Thin Mini ITX form factor

• <b>CPU</b>	• INTEL® LGA 1150 Socket 4th generation Core i7/i5/i3/Pentium Processor
• <b>Chipset</b>	• INTEL® H81 Chipset
• <b>Memory</b>	• 2 * SO-DIMM Sockets Dual Channel DDR3 1600/1333 SDRAM up to 16 GB
• <b>Expansion Slots</b>	• 1 *PCIe x 1 • 1 * half size Mini PCI-E socket
• <b>Storage</b>	• 1 * Serial ATA2 3Gb/s & 1 * Serial ATA3 6Gb/s connectors • 1 * full size mSATA socket (only mSATA)
• <b>Audio</b>	• Realtek ALC662 6-Channel HD Audio CODEC
• <b>Ethernet LAN</b>	• Intel i217LM Gigabit Ethernet LAN *1
• <b>USB</b>	• 6* USB 2.0/1.1 & 2 * USB3.0
• <b>Special Features</b>	• Support ACPI S3 • Support CPU Smart FAN • Support Watch Dog

• <b>Rear Panel I/O</b>	<ul style="list-style-type: none"> <li>• 2 * USB 2.0/1.1 &amp; 2 * USB 3.0 ports</li> <li>• 1 * HDMI</li> <li>• 1 * DVI-I port</li> <li>• 1 * 19V DC-in jack</li> <li>• 1 * RJ-45 port</li> <li>• 1 * MIC-in &amp; 1 * Line-out jacks</li> </ul>
• <b>Internal I/O</b>	<ul style="list-style-type: none"> <li>• 2 * USB 2.0/1.1 headers</li> <li>• CPU /System Fan connectors;</li> <li>• 1 * PS/2 header</li> <li>• 1 * 24-bits Dual CH LVDS &amp; 1 * Inverter connector</li> <li>• 1 * CIR header</li> <li>• 1 * AUDIO header</li> <li>• 1 * Speaker header</li> <li>• 1 * DMIC header</li> <li>• 1 * Front panel header</li> <li>• 1 * FPD Brightness connector</li> <li>• 1 * 2-pin ATX Power header</li> <li>• 1 * 2-pin open case header</li> </ul>
• <b>BIOS</b>	• AMI 64Mb DIP Flash ROM
• <b>Form Factor</b>	• Thin Mini ITX Form Factor (170mm x 170mm)
• <b>Functional</b>	• ATM, POS, AIO, Panel PC, Digital Signage
• <b>Certificate</b>	• CE, FCC, RoHS
• <b>Temperature</b>	<ul style="list-style-type: none"> <li>• Operating within 0-60 centigrade</li> <li>• Storage within -20-85 centigrade</li> </ul>