


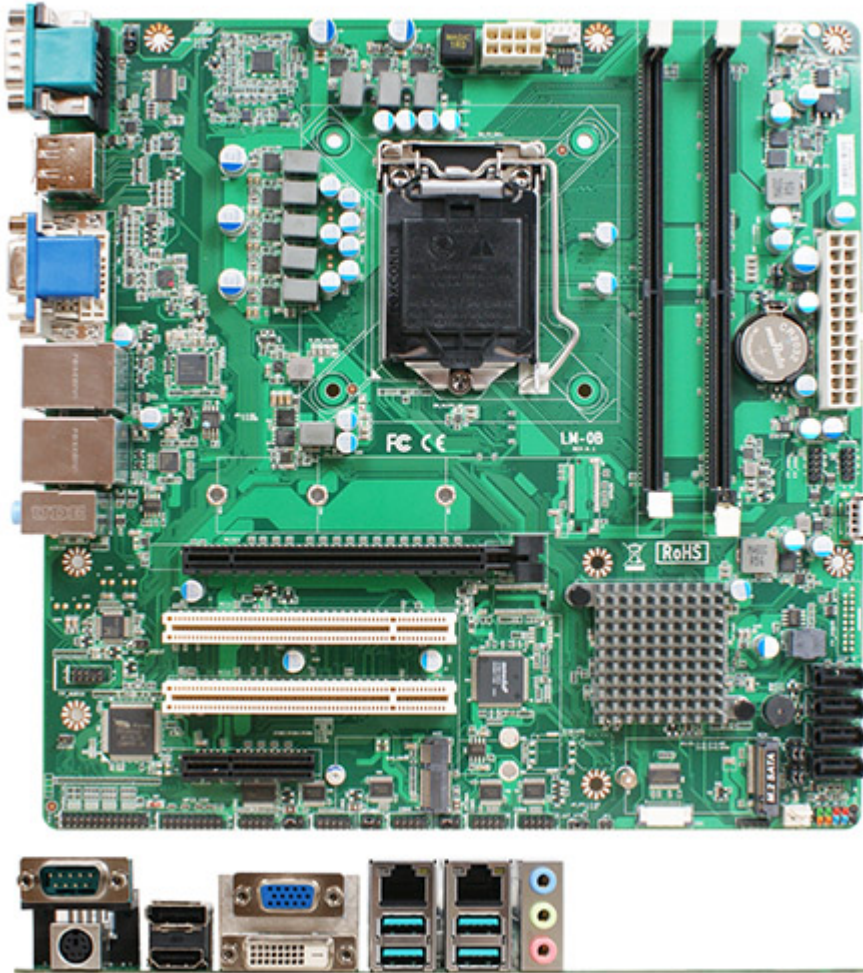

269.00 EUR

incl. 19% VAT, plus [shipping](#)

- LGA1151 Socket !
- H310 Chipset !
- MicroATX !

- Intel® LGA1151 Socket support 9/8th Gen. Core Processor (Max 95W)
- Intel® Coffee Lake-S H310 Chipset
- 2* DDR4 2666/2400/2133MHz SO-DIMM up to 64GB
- Realtek HD Audio (LM0B-00 model)
- 1* Intel® I219-V GbE, 1* Intel® i211AT GbE
- 4* SATAIII (6Gb/s), 1* M.2 (M-key), 1* M.2 (E-key) support CNVi, 1* PCI-E x16, 1* PCI-Ex4, 2* PCI
- Support VGA / DVI-D / HDMI / DP dual display
- 2* RS232/422/485 (COM1/2), 4* RS232, 4* USB3.1, 5* USB2.0
- ATX Power Input
- Micro ATX Form Factor (244 *244 mm)

Model	– JLM0B-00 – JLM0B-0A (Without Audio)
Form Factor	– Micro ATX (244 * 244mm)
Processor System	– Intel LGA1151 Socket support 9/8th Gen. Core Processor (Max 95W) – Intel H310s chipset – AMI 128Mb Flash ROM BIOS

Expansion Slot	– 2* PCI – 1* M.2 M-key (2242, Co-lay SATA4) – 1* M.2 E-key (2230, support CNVi) – 4* SATA (SATA4 Co-lay M.2) – 1* PCIe x16, 1* PCIe x4
Memory	– 2* DDR4 2666/2400/2133MHz LONG DIMM up to 64GB
Graphics	– Intel® HD Graphics, shared memory – 1* VGA (Max Resolution: 1920×1080@60Hz) – 1* HDMI 1.4 (Max Resolution: 4096×2304@24Hz) – 1* DVI-D (Max Resolution: 4096×2304@24Hz) – 1* DP (Max Resolution: 4096×2304@60Hz) – Support Dual Displays
Ethernet	– 1* Intel I219-V GbE – 1* Intel i211AT GbE
Audio	– Realtek HD audio (JLM0B-00 only)
SATA	– 4* SATAIII (6.0Gb/s)
Rear I/O	– 1* VGA – 1* DVI-D – 1* HDMI – 1* DP – 2* RJ45 – 4* USB3.1 – 1* RS232/422/485 (support 5/12V) – 1* PS/2 – Line-in, Line-out, MIC
Internal I/O	– 4* USB 2.0, 1* USB2.0 (Erect) – 5* COM (COM2: RS232/422/485, COM3-6: RS232, COM1-4: support 5/12V TTL) – 4* SATAIII (6.0Gb/s, SATA4 Co-lay M.2 M-key) – 1* M.2 M-key, 1* M.2 E-key – 1* Parallel – 1* GPIO (16 bit) – 1* Chassis intrusion – 1* Audio Header – 1* SMBUS/I2C – 1* AT mode – 1* TPM2.0 (option)
Watchdog Timer	– From Super I/O to drag RESETCON# – 256 segments (10sec ~ 255min)
Power	- ATX PWR (8+24 pin), AT/ATX Supported – AT: Directly PWR on as Power input ready – ATX: Press Button to PWR on after Power input ready
Compliance	– CE, FCC, RoHS, REACH
Temperature	– Operating: 0°C ~ 60°C – Storage: -20°C ~ 85°C – Humidity: 10% ~ 90% RH @40°C (non-condensing)
OS Support	– Windows 10, Linux